


112U

solid-core

TWS revenue grade solid-core current transformer designed for long-life, high-accuracy installations. Provides accurate, isolated current sensing for energy monitoring, power quality, and load management applications.

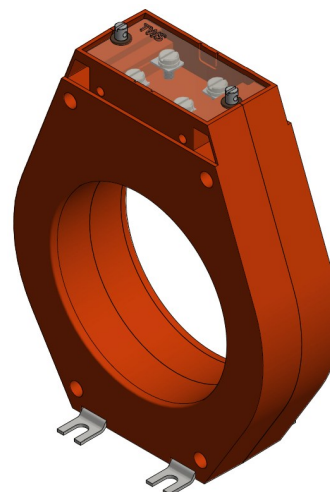

PHYSICAL STRUCTURE	
Coil	Solid-core
Dimensions	207 mm x 162 mm x 49 mm
Cable Diameter	112mm
CONSTRUCTION	
Insulation	0.72 kV
Material	ABS
Iron Core	Silicon Steel
CLASS 0.2	
Primary Current	1000—3200 A
VA Rating	5—15 VA
CLASS 0.5	
Primary Current	300—3000 A
VA Rating	2.5—15 VA
CLASS 1	
Primary Current	600—1600 A
VA Rating	5—25 VA
STANDARDS & COMPLIANCE	
Accuracy Class	0.2%, 0.5%, 1%
IEC / AS	61869-2

ORDER NUMBERS					
PRI 1	PRI 2	PRI 3	VA	CLASS	ORDER NUM.
1000			5	0.2	SEW01B
1000	2000		5	0.2	SAS28
1200			5	0.2	SAL55A
1200	2000		5	0.2	SAS28A
1500			5	0.2	SAP22
1500			7.5	0.2	SCF48
1500	2000		5	0.2	SBQ54
1600			5	0.2	SAI27
1800			5	0.2	SCP87
2000			5	0.2	SEW05A
2000			5	0.2S	SFA62
2500			5	0.2	SAT46
2500			5	0.2S	SAT46A
2500			15	0.2	SBT73
3000			5	0.2	SCP74
3200			10	0.2	SCG62

112U

solid-core



TWS revenue grade solid-core current transformer designed for long-life, high-accuracy installations. Provides accurate, isolated current sensing for energy monitoring, power quality, and load management applications.

ORDER NUMBERS					
PRI 1	PRI 2	PRI 3	VA	CLASS	ORDER NUM.
300			2.5	0.5	SBU68
400	800	1200	10	0.5	SBM22
500			5	0.5	SBB15
500	800		5	0.5	SCJ30
600			5	0.5	SBB46
800			5	0.5	SAW23
1000			5	0.5	SEW01
1000	2000	3000	15	0.5	SBC93
1200			5	0.5	SAH43
1200			5	0.5S	SFA61
1250			5	0.5	SBV27
1500			5	0.5	SAR32
1500			15	0.5	SBC83B
1500	2000		5	0.5	SBQ54A
1600			5	0.5	SEW04A
2500			5	0.5	SCP88
3000			5	0.5	SCR85

ORDER NUMBERS					
PRI 1	PRI 2	PRI 3	VA	CLASS	ORDER NUM.
600			10	1	SCS69
1200			5	1	SAH43B
1500			5	1	SEW03
1600			5	1	SBN03
1600			25	1	SCP55