


45U

solid-core

TWS revenue grade solid-core current transformer designed for long-life, high-accuracy installations. Provides accurate, isolated current sensing for energy monitoring, power quality, and load management applications.

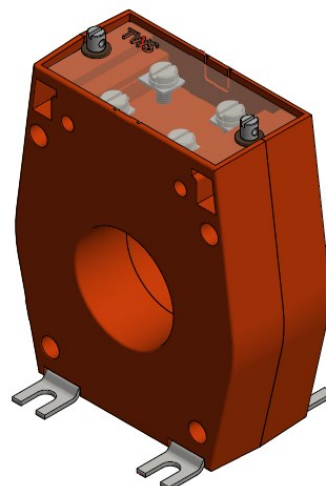


PHYSICAL STRUCTURE	
Coil	Solid-core
Dimensions	130 mm x 103 mm x 45 mm
Cable Diameter	43mm
CONSTRUCTION	
Insulation	0.72 kV
Material	ABS
Iron Core	Silicon Steel
CLASS 0.2	
Primary Current	300 A
VA Rating	5 VA
CLASS 0.5	
Primary Current	150—750 A
VA Rating	2.5—15 VA
CLASS 1	
Primary Current	60—400 A
VA Rating	0.5—10 VA
STANDARDS & COMPLIANCE	
Accuracy Class	0.2%, 0.5%, 1%,
IEC / AS	61869-2

ORDER NUMBERS					
PRI 1	PRI 2	PRI 3	VA	CLASS	ORDER NUM.
300			5	0.2	SBE83
150			2.5	0.5	SAL29A
200			5	0.5	SEW90B
200			2.5	0.5	SBO98
200	400		5	0.5	SEW90F
200	500		5	0.5	SEW90E
250			5	0.5	SCC96
300			2.5	0.5	SBO99
400			5	0.5	SEV86A
400			5	0.5	SEW28
500			5	0.5	SEW29
500			5	0.5S	SFA55
500			15	0.5	SCY43
600			5	0.5	SAX54
700			5	0.5	SCI44
750			5	0.5	SCP86

45U

solid-core

TWS revenue grade solid-core current transformer designed for long-life, high-accuracy installations. Provides accurate, isolated current sensing for energy monitoring, power quality, and load management applications.

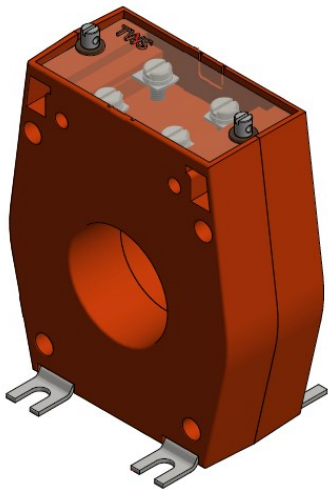

ORDER NUMBERS

PRI 1	PRI 2	PRI 3	VA	CLASS	ORDER NUM.
60			0.5	1	SBT27
100			1.25	1	SCO64
100			2.5	1	SAO69A
100			5	1	SBU24
150			5	1	SEV84B
150	300		5	1	SAO76B
200			5	1	SEV95
200			10	1	SEW90D
300			5	1	SEW27
300			10	1	SEV86B
400			10	1	SEW28A