


68U

solid-core

TWS revenue grade solid-core current transformer designed for long-life, high-accuracy installations. Provides accurate, isolated current sensing for energy monitoring, power quality, and load management applications.

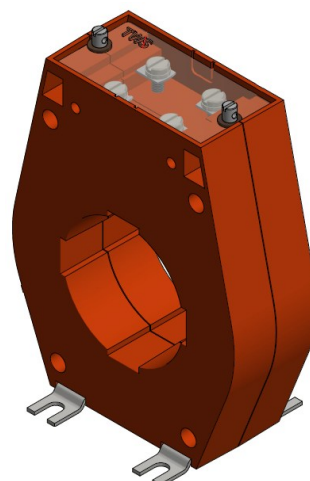


PHYSICAL STRUCTURE	
Coil	Solid-core
Dimensions	162 mm x 122 mm x 45 mm
Cable Diameter	64mm
CONSTRUCTION	
Insulation	0.72 kV
Material	ABS
Iron Core	Silicon Steel
CLASS 0.2	
Primary Current	300—1600 A
VA Rating	5—15 VA
CLASS 0.5	
Primary Current	300—1500 A
VA Rating	2.5—10 VA
CLASS 1	
Primary Current	250—1000 A
VA Rating	5—10 VA
STANDARDS & COMPLIANCE	
Accuracy Class	0.2%, 0.5%, 1%
IEC / AS	61869-2

ORDER NUMBERS					
PRI 1	PRI 2	PRI 3	VA	CLASS	ORDER NUM.
300			5	0.2	SBF53
400			5	0.2	SBO21
500			5	0.2	SBG98
650			5	0.2	SBR80
1000			5	0.2	SBU11
1000			10	0.2	SFA46
1500			5	0.2	SAQ75
1600			5	0.2	SAQ61
1600			15	0.2	SBN68

68U

solid-core

TWS revenue grade solid-core current transformer designed for long-life, high-accuracy installations. Provides accurate, isolated current sensing for energy monitoring, power quality, and load management applications.

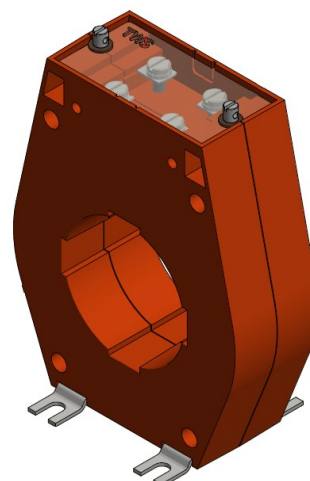

ORDER NUMBERS

PRI 1	PRI 2	PRI 3	VA	CLASS	ORDER NUM.
300			5	0.2	SBF53
400			5	0.2	SBO21
500			5	0.2	SBG98
650			5	0.2	SBR80
1000			5	0.2	SBU11
1000			10	0.2	SFA46
1500			5	0.2	SAQ75
1600			5	0.2	SAQ61
1600			15	0.2	SBN68
150			3	0.5	SAS11
200			2.5	0.5	SCI10
300			5	0.5	SAF36
400			5	0.5	SAI22
400			10	0.5	SCR17
500			5	0.5	SEW34A
500			5	0.5S	SFA56
500	800		5	0.5	SBB74
500	1000		5	0.5	SAM45A
500	1200		5	0.5	SBQ53
600			5	0.5	SEW35A
800			5	0.5	SEW36
800	1200		5	0.5	SBI71
1000			5	0.5	SEW37
1200			5	0.5	SEW38
1250			5	0.5	SBR49
1500			5	0.5	SAQ75A

ORDER NUMBERS

PRI 1	PRI 2	PRI 3	VA	CLASS	ORDER NUM.
250			5	1	SEW95
300			5	1	SEV96
300			10	1	SAQ20A
400			10	1	SAH25
600			5	1	SFA53
600			10	1	SEW35B
1000			5	1	SBU41